



Manual systems for sliding doors up to 120 kg Patented



3 interchangeable systems for an easier industrialization:

- System **2120** for light weight sliding doors of a maximum door weight of 60 kg, minimum door thickness of 40 mm, with fixed handles
- System **2130** for sliding doors of a maximum door weight of 80 kg, minimum door thickness of 50 mm, with fixed handles
- System **2150** for sliding doors of a maximum door weight of 120 kg, minimum door thickness of 50 mm

Features and advantages :

- Manual systems 2120 - 2130 - 2150 brackets have the same fixing positioning
- Using the same track, the difference comes from the accessories and floor guiding parts
- Pleasing appearance and cleanliness are achieved by the 15 microns anodised rail concealing the mechanical components
- Smooth and silent operation through using a dual roller system
- Through use of an anti-derailment feature safety is maximised
- The rail is easy to mount and requires minimum maintenance
- Extremely compact
- Excellent protection against corrosion
- Products in accordance to the UKCA/European Directives and Standards
- The Fermatic 2120-2130-2150 are a perfect answer for use within the Food Industries, Kitchens, Clean Rooms and Supermarkets.

ACCESSORIES

- Internal and external lever handles, face or edge-fixing
- Internal and external fixed handles
- Gaskets

OPTIONS

- Lock 55 or 55 HP (system 2120)
- Lock 57 or 57 HP (systems 2130 - 2150)
- Wall guiding system ⁽¹⁾
- Automatic Kit ⁽²⁾

⁽¹⁾ System 2120: for 75mm minimum door thickness

⁽²⁾ Ask for detailed literature



Wall guiding system 7540





Automatic Kit 5010







FERMATIC 2120 - 2130 - 2150

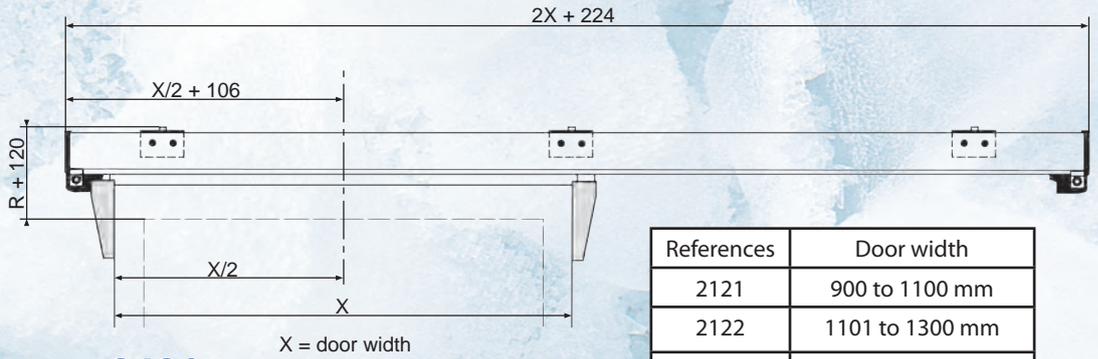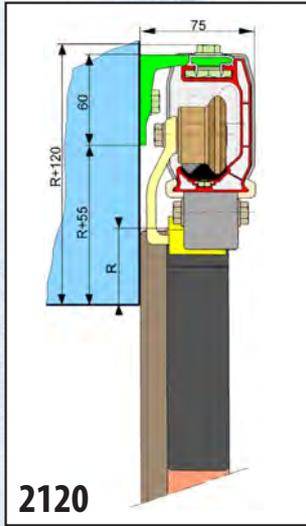

■ 2120

| References | Door width |
|------------|-----------------|
| 2121 | 900 to 1100 mm |
| 2122 | 1101 to 1300 mm |
| 2123 | 1301 to 1500 mm |
| 2124 | 1501 to 1700 mm |


. Delivered also in 6140 mm length

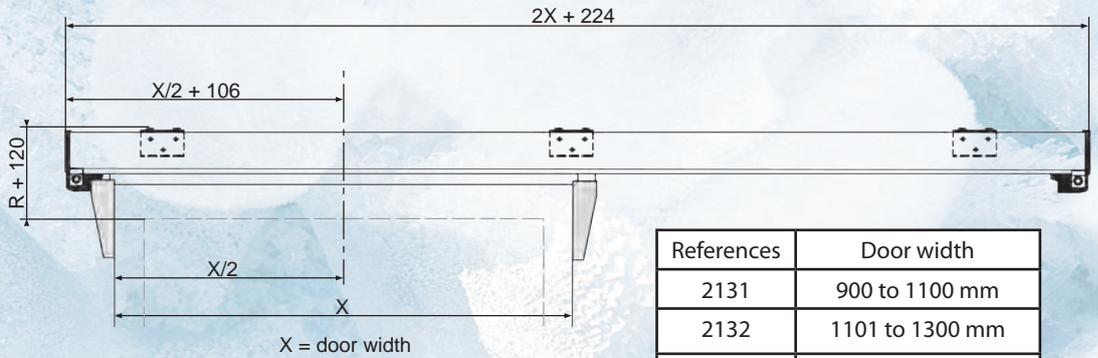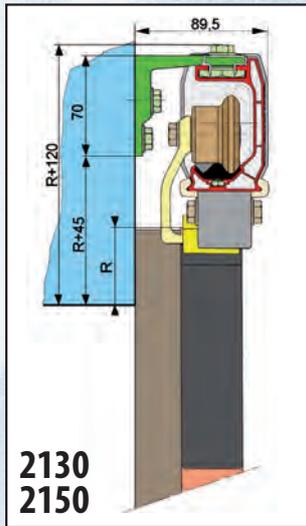

■ 2130

| References | Door width |
|------------|-----------------|
| 2131 | 900 to 1100 mm |
| 2132 | 1101 to 1300 mm |
| 2133 | 1301 to 1500 mm |
| 2134 | 1501 to 1700 mm |
| 2135 | 1701 to 2000 mm |
| 2136 | 2001 to 2300 mm |
| 2137 | 2301 to 2600 mm |

. Delivered also in 6140 mm length

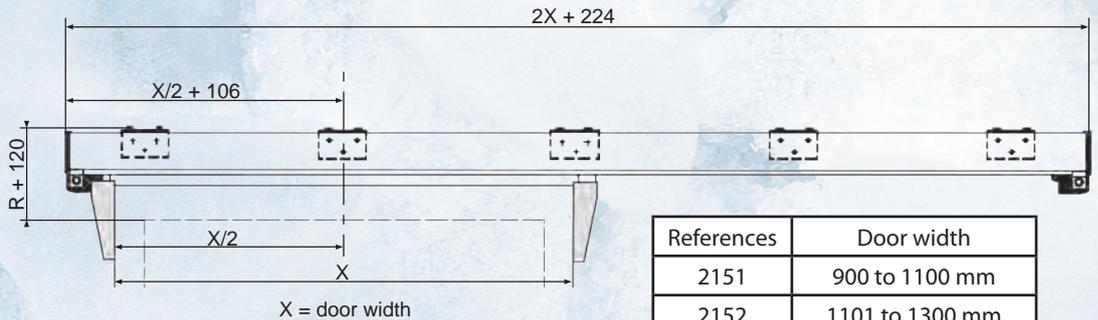

■ 2150

| References | Door width |
|------------|-----------------|
| 2151 | 900 to 1100 mm |
| 2152 | 1101 to 1300 mm |
| 2153 | 1301 to 1500 mm |
| 2154 | 1501 to 1700 mm |
| 2155 | 1701 to 2000 mm |
| 2156 | 2001 to 2300 mm |
| 2157 | 2301 to 2600 mm |

. Delivered also in 6140 mm length

DISTRIBUTOR

imp. Polytechnique - Beauvais



FERMOD®



3 avenue Eugène Gazeau - 60300 SENLIS - FRANCE
 Tél. : +33 (0)3 44 53 12 86 - Fax : +33 (0)3 44 53 62 03
 www.fermod.com • e-mail: contact@fermod.com

Siège Social : Senlis (Oise) - Société Anonyme au Capital de 1 004 400 €
 RCS Compiègne B 301 468 211 - Siret 301 468 211 00018 - APE 2572 Z