



LOCKS 55-55HP and 57-57HP



Locks for manual sliding doors



Open lock



Closed lock



Locks 55-55HP

For sliding doors with 20mm gasket thickness:

- Fermatic 2120

Locks 57-57HP

For sliding doors with 35mm gasket thickness:

- Fermatic 2130, 2150, 2320, 2420, 3530, 4440, 7530, 8530, 8730

2 versions: - Standard
- HP (High Performance)

Internal unlocking by lever

OPTIONS

- Organization chart
- Master key



Internal release 47 STD



Internal release 47 HP







LOCKS 56-56HP and 58-58HP



Locks for automatic sliding doors

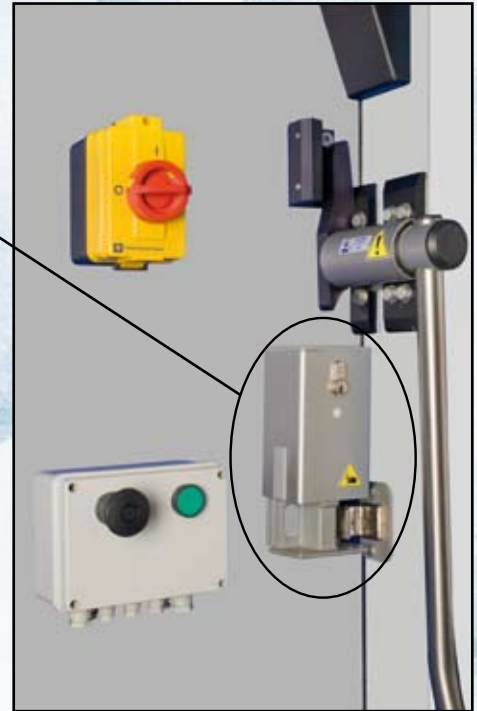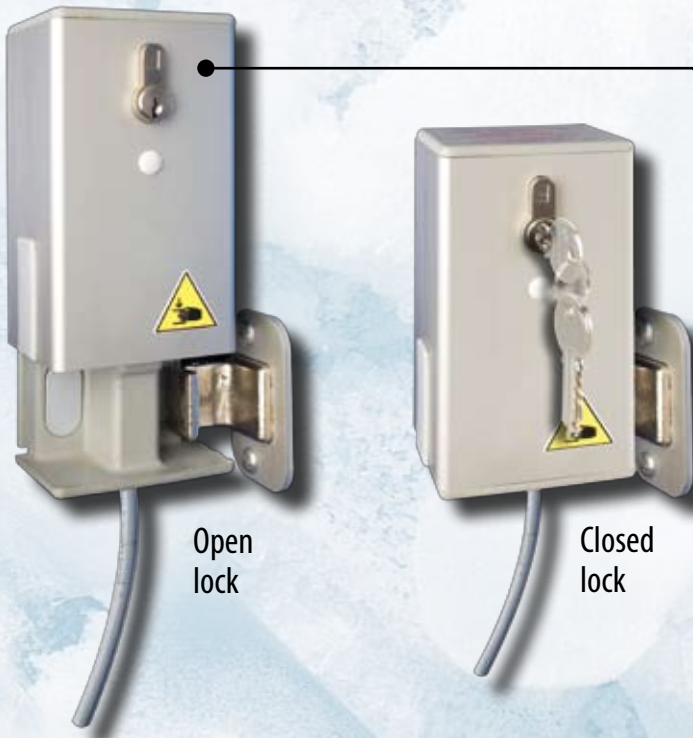

Locks with cut contact

Locks 56-56HP

For automatic sliding doors with 20mm gasket thickness:

- Systems 2180, 2190

Locks 58-58HP

For automatic sliding doors with 35mm gasket thickness:

- Systems 2180/120, 2190/120, 2380, 2390, 2480, 2490, 3580, 7580, 7590, 8790

2 versions: - Standard
- HP (High Performance)

Internal unlocking by lever

OPTIONS

- Organization chart
- Master key



Internal release 47 STD



Internal release 47 HP



FERMOD®



75, rue de Richelieu - 75002 PARIS - FRANCE
Tél. : 33 (0)1 42 96 94 06 - Fax : 33 (0)1 42 86 84 51
<http://www.fermod.com> • e-mail: contact@fermod.com

Siège Social : Senlis (Oise) - Société Anonyme au Capital de 1 004 400 €
RCS Compiègne B 301 468 211 - Siret 301 468 211 00018 - APE 2572 Z

DISTRIBUTOR

Impressione Polytechnica - Bologna Edizione 07/2002/12

« In order to improve the quality of our products, FERMOD reserves the right to modify any products without notice. The characteristics and pictures of the products presented on this documentation are not of any legal value. »